To set up the rear surround speakers (pairing)

SC-ALL2

If you have a compatible Panasonic Home Theater Audio System (e.g. SC-ALL70T/SC-ALL30T), you can use two SC-ALL2 units as rear surround speakers to enjoy surround speaker sound.

SC-ALL30T	SC-ALL70T
■	▬ ■

SC-ALL2 — Surround (L)   SC-ALL2 — Surround (R)

Method 1: Pairing using the app

If SC-ALL70T/SC-ALL30T is connected to the network, you can make rear surround settings using the app "Panasonic Music Streaming" (free of charge).
(Always use the latest version of the app.) For details on the app, refer to the site below.
http://panasonic.jp/support/global/cs/audio/app/ (This site is in English only.)

IMPORTANT Before use, set "REAR SPEAKER" in setup menu of SC-ALL70T/SC-ALL30T to "ON".
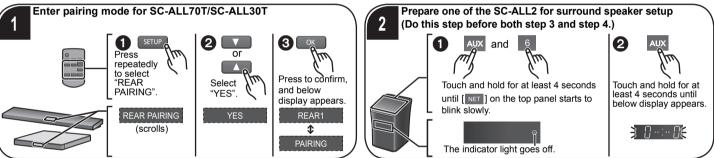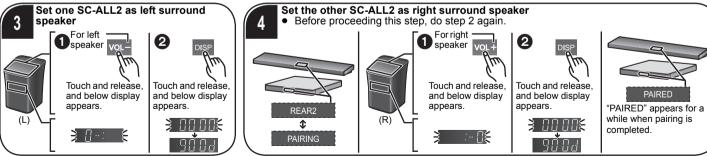
Panasonic

Method 2: Manual pairing

Preparation: Make sure to turn SC-ALL2 and SC-ALL70T/SC-ALL30T on.

1 Enter pairing mode for SC-ALL70T/SC-ALL30T

❶ SETUP — Press repeatedly to select "REAR PAIRING".
REAR PAIRING (scrolls)

❷ ▼ or ▲ — Select "YES".
YES

❸ OK — Press to confirm, and below display appears.
REAR1 ⇕ PAIRING

2 Prepare one of the SC-ALL2 for surround speaker setup (Do this step before both step 3 and step 4.)

❶ AUX and 6 — Touch and hold for at least 4 seconds until [NET] on the top panel starts to blink slowly.
The indicator light goes off.

❷ AUX — Touch and hold for at least 4 seconds until below display appears.

3 Set one SC-ALL2 as left surround speaker

❶ For left speaker VOL − — Touch and release, and below display appears.

❷ DISP — Touch and release, and below display appears.

(L)

4 Set the other SC-ALL2 as right surround speaker
● Before proceeding this step, do step 2 again.

REAR2 ⇕ PAIRING

❶ For right speaker VOL + — Touch and release, and below display appears.

(R)

❷ DISP — Touch and release, and below display appears.

PAIRED
"PAIRED" appears for a while when pairing is completed.

- **The pairing mode is cancelled after about 2 minutes elapses.**
- If the operation does not work as described above, or if pairing fails (e.g. "FAIL" appears on SC-ALL2, or "NOT COMPLETED" appears on SC-ALL70T/SC-ALL30T):
  – Turn SC-ALL2 and SC-ALL70T/SC-ALL30T off and on again, and then repeat the procedure from step 1.
- Refer to the operating instructions for SC-ALL70T/SC-ALL30T for further information.

RQCA2268